

**BERA**  **STABLE PAVE**

**Stable Base For Paving**

**BERA**<sup>®</sup>

**BERA® Stable Pave**

For all your pedestrian pavements with concrete, ceramic or natural materials you can now use our drainable lightweight sub-base. Made of durable and 100% recyclable expanded polypropylene, you can make any paving easy and fast. Replacing 15-20 cm of your sub-base, thus per m<sup>2</sup>:

**Advantages:**

- ☑ Reduce 275 kg of soil excavation
- ☑ Reduce 175 kg of split or stabilized sand
- ☑ Reduce 1/2 hour of labour
- ☑ Reduce logistics costs and CO<sub>2</sub> emissions
- ☑ Reduce sweating!
- ☑ Excellent distribution of vertical loads
- ☑ Excellent thermal protection against frost



**Applications:**

- ☑ Terraces, Patios
- ☑ Walkways, Sidewalks
- ☑ Pool Area's

**Create your paving faster, cheaper and stable - no sweat!**

**TECHNICAL SPECIFICATIONS**

Product	: BERA® Stable Pave
Colour	: Black
Material	: Polypropylene, 100% recyclable
Dimension	: 119 x 79 x 1.6 cm (0.94 m <sup>2</sup> )
Weight	: approx. 1 kg
Drainage	: >2500 l/h (EN12616)
UV and frost	: Protected
Packing	: 65 sheets/pallet
Product safety	: REACH
Production standard	: ISO9001 - IATF16949
Ecology	: OEKO-TEX®

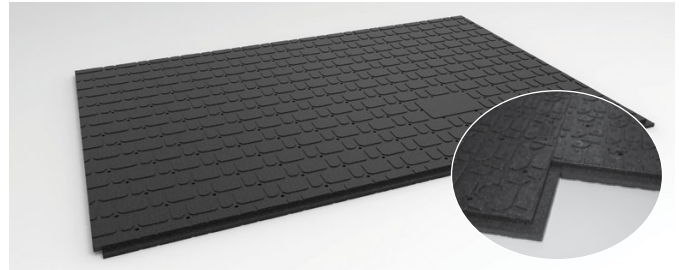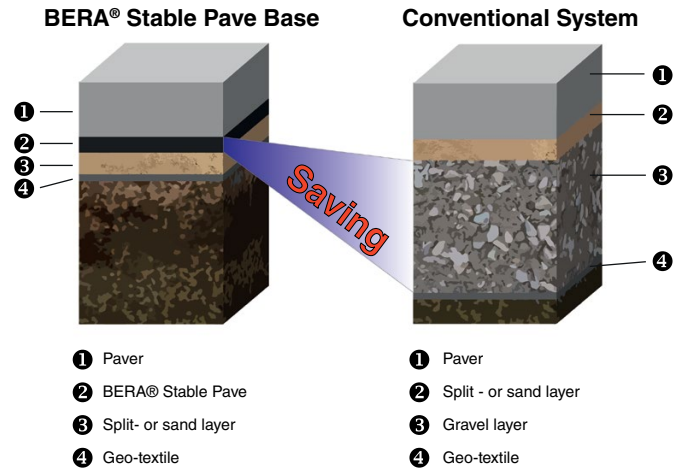

**Installation Instructions**

- 1.** Excavate the area, 4-5 cm deep, compact and level
- 2.** Cover the subsoil with anti-weed material
- 3.** Put 2 cm fine split or sharp sand, compacted and leveled
- 4.** Install BERA® Stable Pave, lay staggered, sheets overlap to be used
- 5.** Install the desired pavers, fill the gaps with appropriate sand, compact, water and sweep

**Note:** The construction sequence is based on firm ground conditions. For soft ground additional measures may be required.

**Contact:**

BERA B.V. (The Netherlands)  
 BERA B.V. (Germany)  
 BERA Sarl (France)  
 BERA CZECH (Czech Republic)  
 BERA South Africa Pty Ltd (South Africa)  
 BERACR Centro America (Central America)

T: +31 (0) 33 257 0302  
 T: +49 (0) 30 78 71 68 85  
 T: +33 (0) 9 81 12 76 58  
 T: +420 777 484 937  
 T: +27 83 449 3954  
 T: +(506) 87039731

E: info@bera-bv.com  
 E: kontakt@bera-bv.com  
 E: info@bera-sarl.fr  
 E: beracz@bera-bv.com  
 E: franko@bera-bv.com  
 E: centro.america@bera-bv.com



[www.bera-bv.com](http://www.bera-bv.com)