



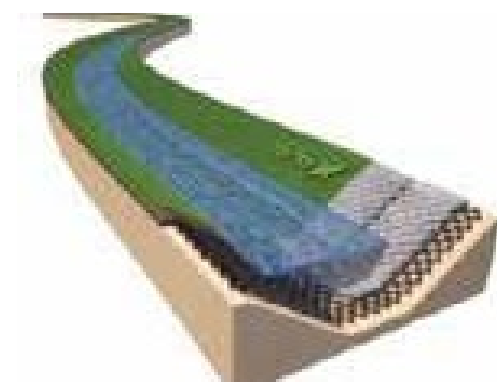

## Technical Specifications

Description	Value			Test Method
Material Composition	UV Resistant Polyethylene (HDPE)			
Height / Cell depth(H) mm	75 – 100 – 150 – 200 (+/-10%)			
Welding Distance (W)/mm (+/-10%)	360	460	660	
Nominal expanded cell size /mm (+/-10%)	210*250	280*340	420*490	
Number of cells / m <sup>2</sup>	5-15			
Color	Black			
Stripe Surface Treatment	Textured surface – perforated / Non perforated			
Welding Type	Ultrasonic			
Strip thickness / mm (+/-10%)	1.2 – 1.5			ASTM D – 5199
Material density kg/m <sup>2</sup> (+/-10%)	0.95			ASTM D – 1505
Tensile strength / KN/m <sup>2</sup> (+/-10%)	12			EN ISO 103119
Seam peel strength / N (+/-10%)	1000			

## Product Gallery

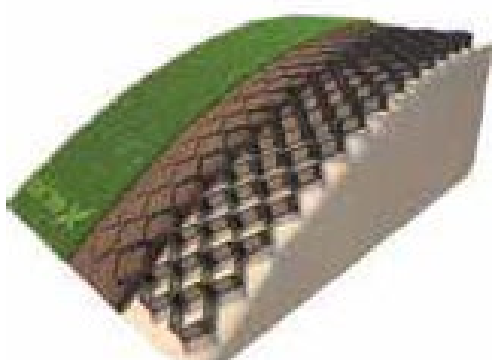

## Applications



Erosion Control



Soil Stabilization & Retaining Walls



Hydraulic Structures

**BERA BV**  
Middelaarseweg 3A  
3871 KR Hoevelaken  
The Netherlands  
T +31 (0)33 257 0302  
F +31 (0)33 257 2228  
E info@bera-bv.com  
W www.bera-bv.com

Registered:  
KvK-Amersfoort  
321 36 340

BTW / VAT:  
NL8195.36.593.B01

ABN-AMRO Bank:  
IBAN: NL59ABNA0489556655  
BIC: ABNANL2A

Rabobank:  
IBAN: NL78RABO0354735217  
BIC: RABONL2U

Volksbank:  
IBAN: DE67 2806 9956 3660 0032 00  
BIC: GENODEF1NEV

## Projects

